


Morsetti fresabili
Top jaws blanks
Aufsatzbackenrohlinge
Mors doux rapportés

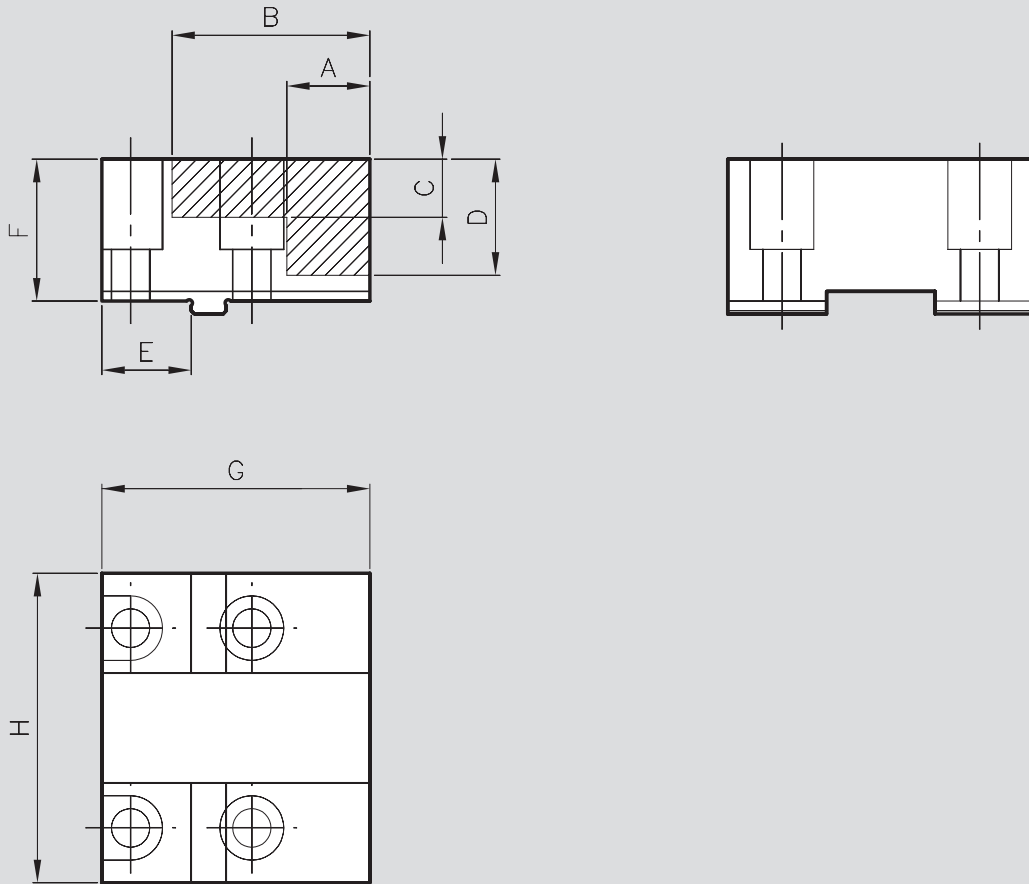

MATERIALE: 18 Ni Cr Mo 5, temprabile
MATERIAL: 18 Ni Cr Mo 5, hardenable
WERKSTOFF: 18 Ni Cr Mo 5, härtbar

VERSIONE: fori e sede testa per vite
VERSION: bored and conter sunk for screw
AUSFÜHRUNG: gebort und gesenkt für
Befestigungsschrauben

| Type | N° ident. | Suitable for | A | B | C | D | E | F | G | H | Total clamping range mm |
|------|-----------|--------------|------|------|----|----|----|----|------|-----|-------------------------|
| 66 | MH-CFB 66 | CFB 66 | 5 | 18.5 | 4 | 11 | 14 | 16 | 31 | 34 | 0-40 |
| 100 | MH-CFB100 | CFB100 | 14 | 35 | 9 | 18 | 16 | 25 | 47 | 55 | 0-70 |
| 160 | MH-CFB160 | CFB160 | 28 | 56 | 19 | 30 | 24 | 40 | 76 | 80 | 0-120 |
| 200 | MH-CFB200 | CFB200 | 28.5 | 65.5 | 21 | 32 | 45 | 45 | 98.5 | 106 | 0-150 |
| 250 | MH-CFB250 | CFB250 | 36 | 80 | 21 | 35 | 54 | 50 | 120 | 125 | 0-170 |